## P-831RE 24VAC Wiring

## Wiring:


At the receiver run one **orange** and one **black** wire back to the **common** at the door operator panel.

At the receiver connect the other **orange** wire to the **open** command at the door operator panel.

At the receiver connect the other **black** wire to the **close** command at the door operator panel.

At the door operator panel find and disconnect the **stop** wire coming from the 3 button station on the wall. Reconnect this **stop** wire from the 3 button station to one of the **gray** wires coming from the receiver. Connect the other **gray** wire from the receiver to the **stop** command at the door operator panel.

At the receiver connect 24VAC to the red and white wires.

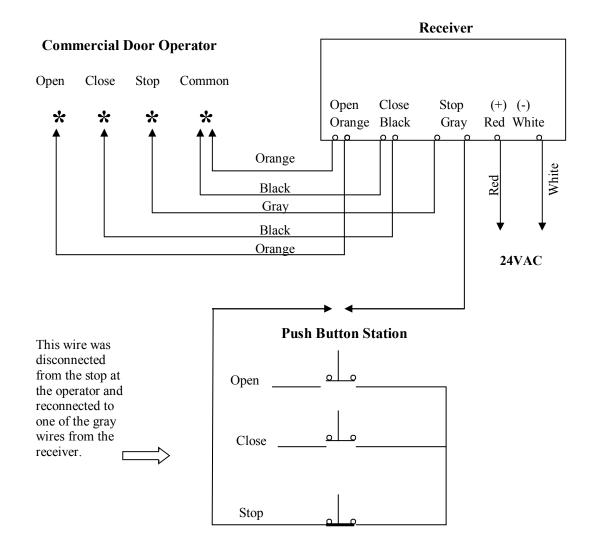

## P-831RE 24VAC Wiring

"Changes or modifications not expressively approved by the party responsible for compliance could void the user's authority to operate the equipment"

"NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.