



EL2000LB



EL2000SS

EL2000

TELEPHONE ENTRY / ACCESS CONTROL SYSTEM

Enhanced Versatility, Bold New Look

The EL2000 is a high-capacity telephone entry access control system designed to complement virtually any gated community. It is flexible enough to be used in apartment buildings, condo complexes, office parks and commercial sites. It features a 5-inch backlit LCD screen and clearly displays up to 4 lines with 20 characters per line, making it a great choice for multi-tenant installations. Available in cast housing (black, gray, nickel) or our new stainless steel housing.

Performance

- **Entry Codes** allow for 2,000 4-digit codes to be programmed. The codes can be time-restricted and/or use restricted.
- **Call Waiting** allows the resident to answer a call from the gate or door while on another call.
- **Recessed, Lighted, ADA-Compliant Keypad** makes entering your PIN easy and convenient.
- **Transaction Monitoring** stores a maximum of 8,000 transactions including date, time, identification and transaction type.
- **Remote Updates** enables system updates and upgrades to be made via a modem connection.
- **Two Expansion Ports** allow up to two plug-in Wiegand Module Kits (WOMODKT), each Kit supporting up to two Wiegand access control devices including card readers, keypads or PPWR radio receiver.
- **Programmable Relays** provide four assignable built-in relays.
- **Activity Reporting** gives property managers the ability to print database, system and history reports.
- **Call Forwarding and Do Not Disturb** schedules can be programmed for every resident.

Safety and Security

- **Auto Sensor** input automatically dials the residence or can activate relays.
- **Anti-Passback** prevents pass back of cards and codes for a pre-programmed amount of time to eliminate tailgating.
- **Security Lockout** prevents access for a pre-programmed amount of time when too many invalid code attempts are made.
- **Postal Lock** provision supports a switch kit that integrates with U.S. Postal Service lock so only a postal carrier can enter.
- **Unlock Schedule** for a gate or door allows you to configure entry points to automatically open or lock at set periods of time.
- **Holiday Programing** provides up to 16 days that can be defined to override the standard lock/unlock schedules.
- **Time Zone Feature** allows for up to 62 programmable time zones with three segments each.

For more information
visit www.devancocanada.com

OPTIONAL ACCESSORIES:



Passport Receiver (PPWR)

Security+ 2.0® receiver compatible with LiftMaster® Access Control solutions. Supports standard Weigand protocol in two operational modes: Pass-Thru and Advanced (WOMODKT required).



3-Button Passport MAX Visor Remote Control (PPV3M)

Compatible with PPWR, LiftMaster Security+ 2.0 and Security+® Residential Garage Door Openers.



3-Button Mini Passport MAX Keychain Proximity Remote Control (PPK3PHM)

Remote control with Weigand proximity sensor for access control integration with a card reader. Compatible with PPWR, LiftMaster Security+ 2.0 and Security+ Residential Garage Door Openers.



EL25/EL2000 Wiegand Module (WOMODKT)

Supports two Wiegand-compatible remote control access devices.



Wired Keypad and Proximity Reader (KPR2000)

Single-entry multi-function access controller with integrated keypad and card reader.



Combo Keypad/Card Reader Wiegand Output (HIDWOKPRO)

125 kHz wall switch keypad proximity reader. Sealed for indoor or outdoor use.



EL2000 LCD Display Heater (ELHTRKT)

Allows the EL2000 LCD display to maintain normal operation to approximately -20° F.



DVR Compatible Low-Lux Color Camera Kit (EL2000DVRCAMKT)

Optional color low-lux camera, compatible with DVR.

LiftMaster®

SPECIFICATIONS

POWER

120 VAC transformer included.

SHIPPING WEIGHT

20 lbs.

DIMENSIONS

EL2000LB, EL2000LG, EL2000LN:

15 in. H x 12 in. L x 3.625 in. D

EL2000SS:

16 in. H x 11.25 in. L x 3.25 in. D

MODEL NUMBERS

EL2000LB - LCD unit in black cast housing

EL2000LG - LCD unit in dark gray cast housing

EL2000LN - LCD unit in nickel cast housing

EL2000SS - LCD unit, stainless steel housing

ADDITIONAL FEATURES

VERSA SOFTWARE

Versa XS is a Microsoft Windows® based software application that allows you to use almost any Windows personal computer to conveniently and securely configure, manage and update access control records. Download the latest version of Versa.

See LiftMaster.com/SoftwareDownload

UNIVERSAL BOARD

The EL25 and EL2000 share the same main processing board, which makes it much easier to master the installation and service both systems.

REMOTE ACCESS DIAGNOSTICS

The EL2000 will retain unit alarms within the system event buffer. For added security, the unit will record the following alarms: forced door/gate and ajar door/gate. The EL2000 also records unit over voltage and under voltage alarms, allowing for simplified troubleshooting of the system.

E-Z SCAN

Cards and Passport remote controls can be programmed into the EL2000 simply by using the optional card reader or radio receiver installed into one of the plug-in modules. Is compatible with the PPWR and Passport remote controls.

VOICE PROMPTS

Guides installers through system setup at the unit's main keypad and provides assistance to end users with the push of a button. (ADA application)

WARRANTY

1 Year.

OPTIONAL ACCESSORIES



Pedestals (PED42, PED64)

42 in. pad mount (3 x 3 in.) and 64 in. in-ground (2 x 2 in.) square black powder coated pedestal (excluding stainless steel model).

Trim Kits (EL2000SSTKN, EL2000SSTKW)

Trim kits compatible with model EL2000SS only. Kit includes a bezel, housing, mounting brackets and hardware. EL2000SSTKN retrofits to Dial Code, Infinity S/M. EL2000SSTKW retrofits to Infinity L and ICON26.

EL2000SSTKN:

Trim Kit, Narrow

Bezel:

18.83 in. H x 14.58 in. W

Back Housing:

16.44 in. H x 11.64 in. W

EL2000STTKW:


Trim Kit, Wide

Bezel:

23.77 in. H x 19.43 in. W

Back Housing:

16.44 in. H x 11.64 in. W

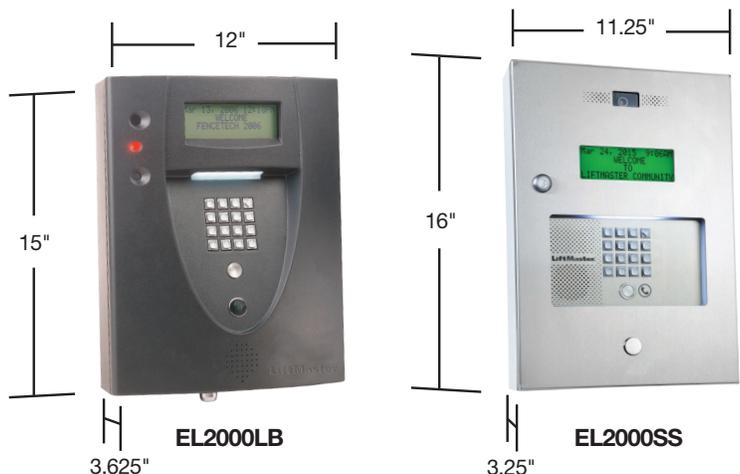

Can only be mounted in portrait style.