






# RADIOEM901 - Dip Switch Transmitter

## Replacement and Programming Instructions

### Transmitters: Replacement and Compatibility

Replacement Product			Discontinued Product			
Transmitter	<b>RADIOEM901</b>		<ul style="list-style-type: none"> <li>• 1-Button Transmitter.</li> <li>• Operates 1 door.</li> <li>• Open / Close function.</li> <li>• Ergonomic design.</li> <li>• LED indicator.</li> <li>• Battery: 1x A23 (12V).</li> <li>• Key ring.</li> </ul>	<b>RADIO028 (MT3-1000)</b>		<ul style="list-style-type: none"> <li>• 1-Button Transmitter.</li> <li>• Operates 1 door.</li> <li>• Open / Close function.</li> <li>• Battery: 1x A23 (12V).</li> <li>• Key-chain and ring.</li> </ul>

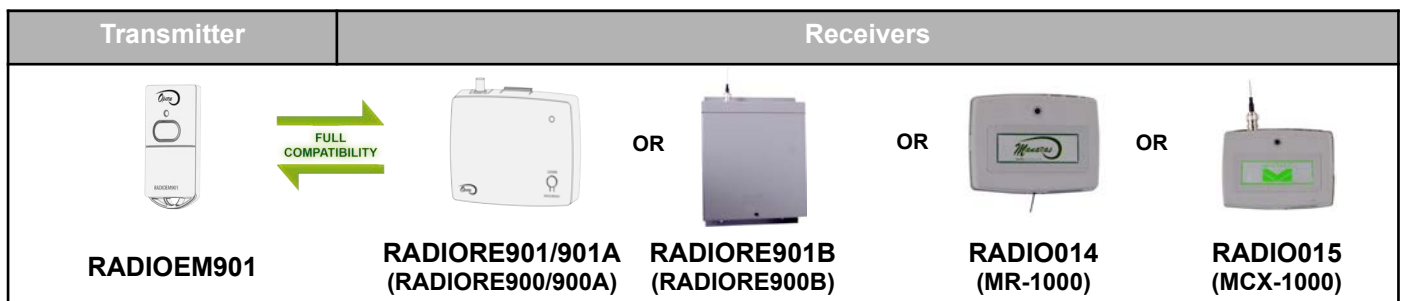

### ➤ Replacing RADIO028 (1-Door Transmitter) with new RADIOEM901 (1-Door Transmitter) and/or Pairing RADIOEM901 with RADIO014 / RADIO015 Receivers:


The DIP SWITCH transmitter has 10 switching keys. With the use of a screwdriver or a pen, place the dip switch keys on RADIOEM901 at the same positions as those found on RADIO028 Transmitter or RADIO014/015 Receivers. Use button ① to operate the door.

#### Coding the Receiver (as reference):



➔ Dip Switch Keys #1 to #10 = must be at the same ON / OFF positions as the transmitter.

Door ① = Receiver ① → Button ①

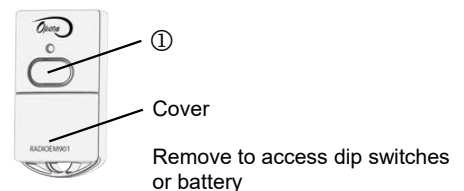ON	1	2	3	4	5	6	7	8	9	10
↑	<b>Must match with transmitter</b>									



### ➤ Pairing RADIOEM901 Transmitter to RADIORE901 Receiver:

1. Make sure the dip switch keys inside the RADIOEM901 transmitter are set.
2. Press the **LEARN** button on the RADIORE901 receiver. The **RED LED** will  **BLINK**. You have 15 sec. to complete the configuration or you will need to restart.
3. Press **Button ①** on the transmitter to pair to the RADIORE901 receiver.
4. The **RED LED** will stop  blinking. The RADIORE901 has now been paired with the transmitter.
5. Only one transmitter needs to be matched per receiver. The other transmitters with the same dip switch configuration will pair automatically.



# RADIOEM901 - Dip Switch Transmitter

## Replacement and Programming Instructions

### FCC and ISED

This device complies with Part 15 of the FCC Rules and Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

**WARNING:** Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**NOTE:** This device has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules and Industry Canada ICES standards. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: (1) Reorient or relocate the receiving antenna. (2) Increase the separation between the equipment and receiver. (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. (4) Consult the dealer or an experienced radio/TV technician for help.

For further information, please consult the operator's Installation & Instruction Manual or contact our Technical Support Department at **1-800-361-2260**.

**For more information, please visit [www.devancocanada.com](http://www.devancocanada.com) or call toll free at 1-855-931-3334**