

ROLL-UP SHEET DOORS

DS SERIES



Model DS-100

For more information, please visit www.devancocanada.com or call toll free at 855-931-3334

- DS-350 COMMERCIAL WIND LOAD ROLL-UP DOOR
- DS-200 COMMERCIAL ROLL-UP DOOR
- DS-100 LIGHT COMMERCIAL ROLL-UP DOOR
- DS-75 LIGHT COMMERCIAL MINI ROLL-UP DOOR
- DS-50 LIGHT COMMERCIAL ROLL-UP COUNTER SHUTTER

DEVANCO
CANADA 


ROLL-UP SHEET DOORS DS SERIES

Key Standard Features


- Round or square panel profile continuous curtains constructed of 26 gauge, hot-dipped galvanized steel with a silicone polyester paint finish.
- Automatic door stops prevent the curtain from rolling up past the header.
- Heavy-duty steel axle supports door curtain and counterbalance system.
- Oil-tempered steel springs are engineered to counterbalance the doors, providing for smooth, easy operation and cycle performance.

Color Options

20 Year Warranty Against Chalk and Fade

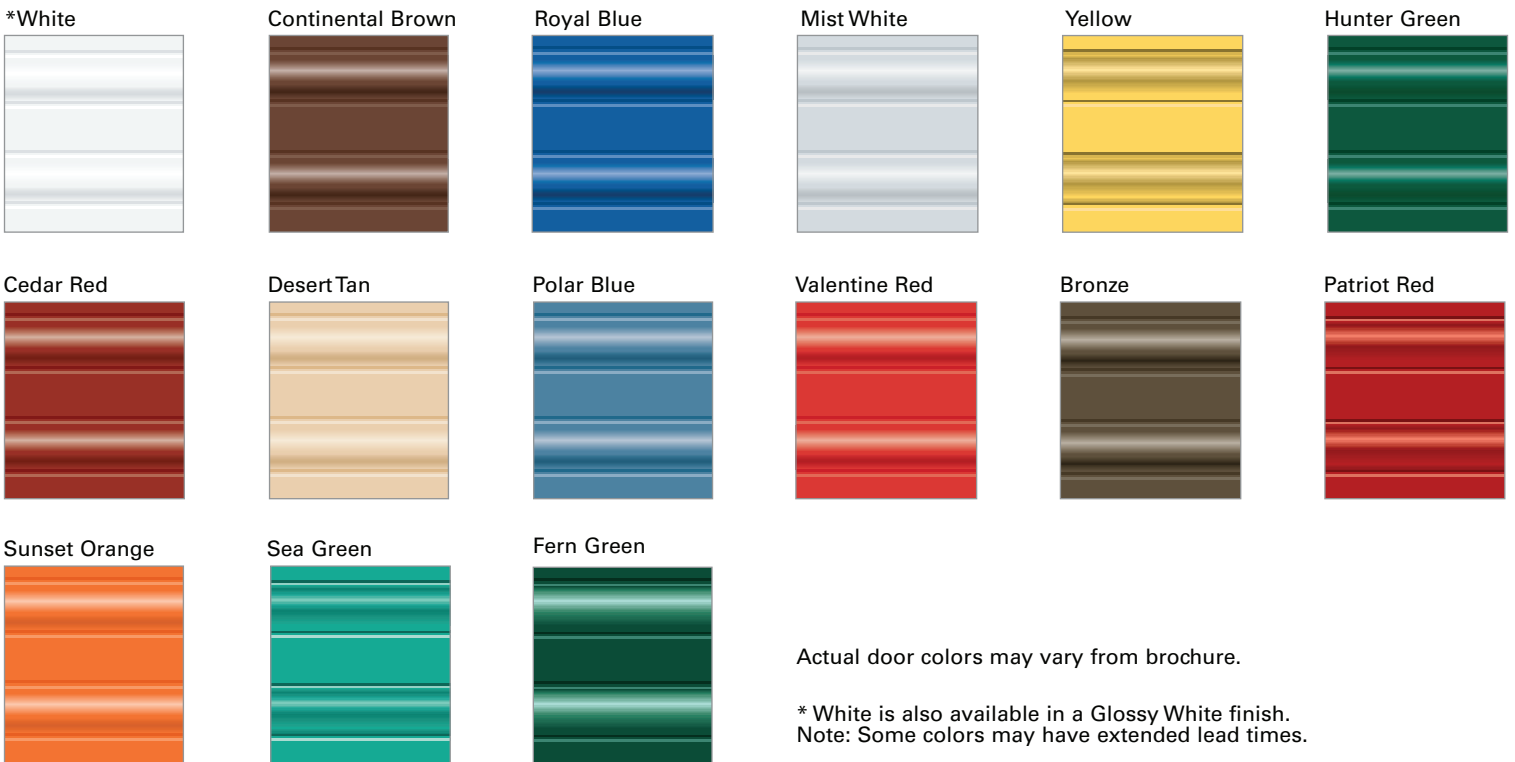

10 Year Warranty Against Chalk and Fade

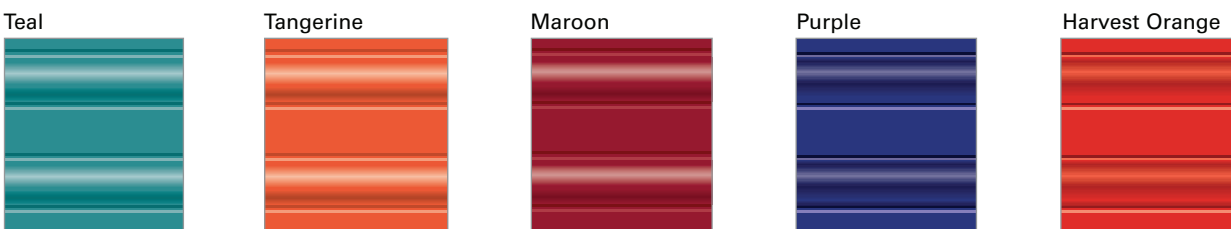

DS-350 COMMERCIAL WIND LOAD ROLL-UP DOOR



DS-350 doors have Statewide Florida Product Approval for wind load protection up to 150 mph.

Standard Features

- For Florida wind load approvals protection up to 150 mph; third party tested for uniform static air pressure. Cast windlocks are available as required by wind load rating.
- Maximum width 16'; maximum height 16'.
- Heavy-duty 13 gauge steel guides and 8 gauge steel wall angles provide maximum wind load protection.
- Factory-installed polypropylene anti-wear strip and nylon strap on guide and curtain provide for quiet operation and less curtain wear.
- Cam-action spring tensioning device allows easy adjustment of spring tension.
- Extruded aluminum bottom bar with heavy-duty steel angle and replaceable bulb-type vinyl astragal.
- Steel padlock-able interior slide-bolts at each bottom corner secure the door.

Options

- Sliding curtain lock for securing the door from the exterior.
- Direct-drive chain hoist for door sizes up to 12'x12'.
- 4:1 reduce-drive chain hoist available for door sizes up to 12'1" x 16'0".
- Electric operator kit adapts any door to motorized operation.
- Steel mounting plates provide lateral extension of jambs.
- Door insulation featuring two layers of aluminum mylar film laminated to two layers of heavy-duty polyethylene air-bubble material provides R-value of 4. Includes flexible vinyl top and side draft stops acting as weather seals to control heat gain or loss.

WIND LOAD RATING - 2009 and previous International Building Code

Maximum Width	Panel Profile	Design Pressure	Equiv. Basic Wind Speed	
			EXP. B	EXP. C
10'0"	ROUND	± 37PSF	150 MPH	130 MPH
16'0"		± 28PSF	130 MPH	110 MPH
10'0"	SQUARE	± 44PSF	160 MPH	140 MPH
12'0"		± 40PSF	160 MPH	130 MPH
16'0"		± 34PSF	150 MPH	130 MPH

Pressure/Speed conversions per DASMA TDS 155

WIND LOAD RATING - 2010 Florida Building Code/2012 International Building Code

Maximum Width	Panel Profile	Design Pressure	Equiv. Basic Wind Speed	
			EXP. B	EXP. C
10'0"	ROUND	± 37PSF	190 MPH	170 MPH
16'0"		± 28PSF	170 MPH	140 MPH
10'0"	SQUARE	± 44PSF	200 MPH	186 MPH
12'0"		± 40PSF	200 MPH	175 MPH
16'0"		± 34PSF	190 MPH	165 MPH

Pressure/Speed conversions per DASMA TDS 155

DS-200 COMMERCIAL ROLL-UP DOOR



Loading docks, outbuildings and large storage facilities are typical uses for the attractive appearance, sturdy construction, generous dimensions and long service life of DS-200 doors.

Standard Features

- Maximum width 16'; maximum height 16'.
- 14 gauge steel 2" wide guides.
- Factory-installed polypropylene anti-wear strip and nylon strap on guide and curtain provide for quiet operation and less curtain wear.
- Cam-action spring tensioning device allows easy adjustment of spring tension.
- Extruded aluminum bottom bar with heavy-duty steel angle and replaceable bulb-type vinyl astragal.
- Steel padlock-able interior slide-bolts at each bottom corner secure the door.

Options

- Sliding curtain lock for securing the door from the exterior.
- Direct-drive chain hoist for door sizes up to 12'x12'.
- 4:1 reduce-drive chain hoist available for door sizes up to 12'1" x 16'0".
- Electric operator kit adapts any door to motorized operation.
- Steel mounting plates provide lateral extension of jambs.
- Vision lites available on uninsulated doors allowing for visibility through door.
- Door insulation featuring two layers of aluminum mylar film laminated to two layers of heavy-duty polyethylene air-bubble material provides R-value of 4. Includes flexible vinyl top and side draft stops acting as weather seals to control heat gain or loss.

DS-100 LIGHT COMMERCIAL ROLL-UP DOOR



Mini storage buildings, loading docks and service buildings benefit from the versatility, sturdy construction, easy operation and long service life of DS-100 doors.

Standard Features

- Maximum width 10'; maximum height 10'.
- 18 gauge steel 2" wide guides.
- Factory-installed polypropylene anti-wear strip on guide provides for quiet operation and less wear.
- Tension-Pro adjustable spring device allows for adjustment of spring tension.
- Extruded aluminum bottom bar with heavy-duty steel angle and replaceable bulb-type vinyl astragal.
- Steel padlock-able interior slide-bolts at each bottom corner secure the door.

Options

- Rust-resistant mini curtain lock allows access from outside; designed for owner and tenant security.
- Door insulation featuring two layers of aluminum mylar film laminated to two layers of heavy-duty polyethylene air-bubble material provides R-value of 4. Includes flexible vinyl top and side draft stops acting as weather seals to control heat gain or loss.
- Wind load option of up to ± 34 PSF on doors 10' maximum in width.

DS-75 LIGHT COMMERCIAL MINI ROLL-UP DOOR



Both owners and tenants of mini storage buildings benefit from the sturdy construction, easy operation and long service life built into DS-75 doors. Installation to masonry, steel or wood jambs is quick and simple—no special preparation, no overhead tracks.

Standard Features

- Maximum width 10'; maximum height 10'.
- 18 gauge steel 2" wide guides.
- Factory-installed polypropylene anti-wear strip on guide provides for quiet operation and less wear.
- Tension-Pro adjustable spring device allows for adjustment of spring tension.
- Roll-formed galvanized steel bottom bar with heavy-duty steel angle and replaceable blade-type vinyl astragal.
- Exterior mounted curtain locking assembly accepts padlocks or cylinder locks for owner/tenant security. Includes lock-out feature.

Options

- Door insulation featuring two layers of aluminum mylar film laminated to two layers of heavy-duty polyethylene air-bubble material provides R-value of 4. Includes flexible vinyl top and side draft stops acting as weather seals to control heat gain or loss.
- Wind load option of up to ± 34 PSF on doors 10' maximum in width.

DS-50 LIGHT COMMERCIAL ROLL-UP COUNTER SHUTTER



Our attractive counter shutters harmonize with virtually any building decor while protecting property from unauthorized entry.

Standard Features

- Maximum width 12'; maximum height 6'.
- Extruded aluminum, 2" wide guides.
- Factory-installed polypropylene anti-wear strip on guide provides for quiet operation and less wear.
- Tension-Pro adjustable spring device allows for adjustment of spring tension.
- Extruded aluminum bottom bar with heavy-duty steel angle and replaceable bulb-type vinyl astragal.
- Steel padlock-able interior slide-bolts at each bottom corner secure the door.

Options

- Rust-resistant mini curtain lock allows access from outside; designed for owner and tenant security.

ROLLING SHEET DOORS

Roll-Up Sheet Doors

Model	Max Width	Max Height	Locking	Steel Gauge
DS 350	16'0" (4877 mm)	16'0" (4877 mm)	Curtain Lock, Two-Bolt Double Shackle Lock; or Cylinder Lock	26 Gauge Steel
DS 200	16'0" (4877 mm)	16'0" (4877 mm)	Slide Bolt or Curtain Lock	26 Gauge Steel
DS 100	10'0" (3048 mm)	10'0" (3048 mm)	Slide Bolt or Curtain Lock	26 Gauge Steel
DS 75	10'0" (3048 mm)	10'0" (3048 mm)	Curtain Lock	26 Gauge Steel
DS 50	12'0" (3658 mm)	6'0" (1829 mm)	Slide Bolt or Curtain Lock	26 Gauge Steel

– HOW TO ORDER REPAIR PARTS –

DEVANCO CANADA

19192 HAY ROAD, UNIT Q, SUMMERSTOWN, ON K0C 2E0
TOLL FREE: 855-931-3334 • www.devancocanada.com

WHEN ORDERING REPAIR PARTS PLEASE SUPPLY THE FOLLOWING INFORMATION:

✓ PART NUMBER ✓ DESCRIPTION ✓ MODEL NUMBER

For more information, please visit www.devancocanada.com or call toll free at 855-931-3334

DEVANCO

CANADA

For more information:
www.devancocanada.com
or call toll free at 855-931-3334

DISTRIBUTED BY:

