




FELCO C7 - Industrial

Cable cutter - Cable cutter

Made in Switzerland by FELCO

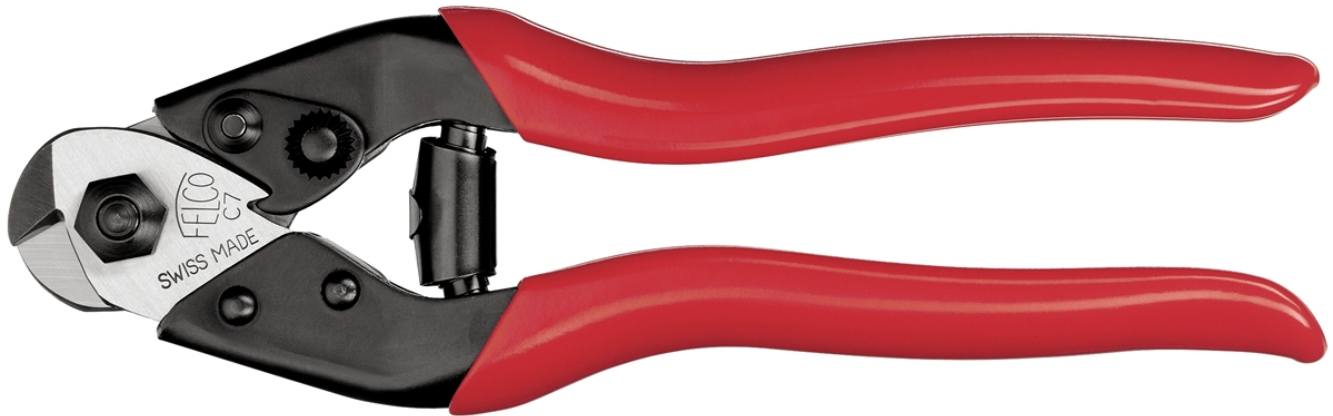

7mm/0.28in. 190mm/7.5in. 270g/9.5oz.



Gives a clean cut without squashing thanks to the triangular cutting system / blades and centre bolt in high-quality hardened steel for exceptional performance / thumb catch designed for one-handed operation / pressed steel handles with non-slip grips



For more information:
www.devancocanada.com
or call toll free at 855-931-3334

RECOMMENDED FOR

Our recommendation (★ = Recommended, ★ ★ = Strongly recommended, ★ ★ ★ = Best fit)

Cables, wire-drawing mills	★ ★ ★
Springs industry	★ ★ ★
Electricity, telecommunications	★ ★ ★
Oil industry	★ ★ ★
Automotive, pneumatics industry	★ ★ ★
Gondola lifts, cable cars, ski-lifts, life-lines	★ ★ ★
Aeronautics	★ ★ ★
Watersports	★ ★ ★
Harbour activities	★ ★ ★
Forestry Industry	★ ★ ★
Agriculture, viticulture	★ ★ ★
Packaging, unpacking, strips	★ ★ ★
DIY, leisure, floral arrangements	★ ★ ★
Cinema, theatre, events	★ ★ ★
Administration, police, customs	★ ★ ★
Civil engineering, buildings	★ ★ ★
Repair and manufacturing workshops	★ ★ ★
Small hand	★ ★ ★
Average-sized hand	★ ★ ★
Large hand	★ ★ ★
Right-handed	★ ★ ★
Left-handed	★ ★ ★

CUTTING CAPACITIES

Material	Maximum cutting diameter
Galvanized steel cables, textile core	7mm (0.28in)
Galvanized steel cables, steel core	6mm (0.24in)
Hard steel cables, resistance 160 kg/mm ²	5mm (0.2in)
Non-oxidable steel cables, resistance 190 kg/mm ²	4mm (0.16in)
Extra tough cables and strands, resistance 210 kg/mm ²	3mm (0.12in)
Electric cables (copper or aluminium) with steel core)	7mm (0.28in)
Aluminum- or copper rods	5mm (0.2in)
Iron rods, resistance 60 kg/mm ²	4mm (0.16in)
Tempered spring wire	2.5mm (0.1in)
Welded wire mesh	
Rubber conveyor belt	

THE POINTS OF EXCELLENCE



High-strength blades

Hardened and tempered blades for cutting the strongest of cables.



Triangular cutting action

FELCO's innovative triangular cut allows you to progressively cut cable wires and at the same time avoid squashing of strands. Thanks to this feature, it is generally not necessary to tie the cable before the cut.

ACCESSORIES



FELCO 902
Sharpening tool
Sharpening stone



FELCO 903
Sharpening tool
Sharpener



FELCO 910
Holster
Leather - With belt loop and clip



FELCO 912
Holster
Leather - With belt clip



FELCO 913
Holster
In mock leather - With belt loop










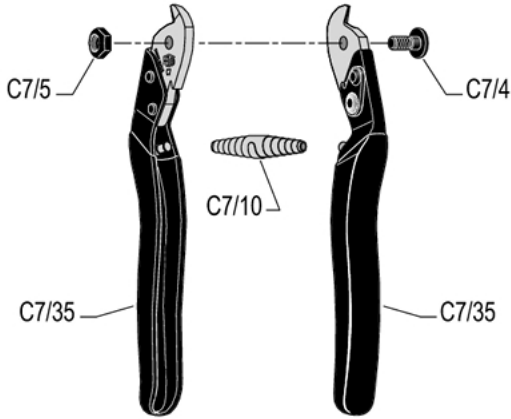

FELCO 980
Maintenance product
Spray



FELCO 990
Maintenance product
Grease

SPARE PARTS



FELCO	REF.	Designation	Composition	UCC Barcode
	C7/35	Coating	1x C7/35	
	C7/4	Bolt	1x C7/4	
	C7/5	Counter nut	1x C7/5	
	C7/10	Spring	1x C7/10	

MAINTENANCE



Oiling

After cleaning, it is advisable to oil the tool so as to protect it from corrosion. The oil will also unjam the tool.