

# Cell Box Prime 4G LTE

AT&T SIM Card  
Included at No Charge  
for easy activation.

## RANGE

Access Control

### BFT CELLULAR CALL BOX WITH KEYPAD

**BFTCELL-PRIME4G:** CELLULAR CALL BOX W/ KEYPAD- PEDESTAL MOUNT


**BFTCELL-PRIM4GE:** CELLULAR CALL BOX W/ KEYPAD-SURFACE VERTICAL MOUNT

**BFTCELL-PRI4GEF:** CELLULAR ACCESS SYSTEM W/KEYPAD VERTICAL FLUSHMOUNT

**BFTCELL-PRI4GFH:** CELLULAR ACCESS SYSTEM W/KEYPAD FLUSHMOUNT HORIZONTAL (STAINLESS STEEL RING)



- Open gates from your phone.
- Built in time clock control.
- Remotely program your keypad codes by app.
- Automatic 7-day timer controlled by the app.
- Activity log (see who opened your gates and when).
- Access your property by telephone, caller ID (known number), SMS, or pin code.
- 15V DC power supply adaptor included.
- Built-in illuminated keypad with 200 codes, 20-time zone codes, 30-temporary codes.
- 100 Registered caller id users.
- Get a call from your cellbox anywhere in the world.
- Two year limited warranty.

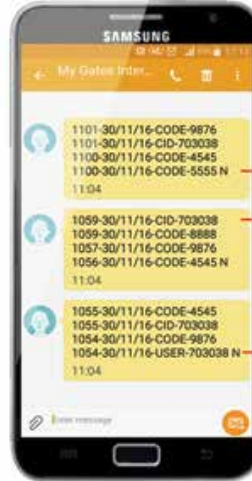

**CODE:** Keypad code used, with date and time!

**CID:** Caller ID user with last 6 digits of phone number shown!

**USER:** Home user, opened their gates at this time and date.

Available on the  
App Store



Available on  
Google play



BFT Cellbox Prime



Accessories  
for  
Low Signal  
Areas:



RX489WB- Yagi antenna

J195SN20- Cable for yagi antenna

SIGNAL4GKIT: 4G amplified antenna


For more information, please visit [www.devancocanada.com](http://www.devancocanada.com) or call toll free at 855-931-3334

# Cell Box Prime 4G LTE




## PHYSICAL MEASUREMENTS

### BFTCELL-PRIME4G

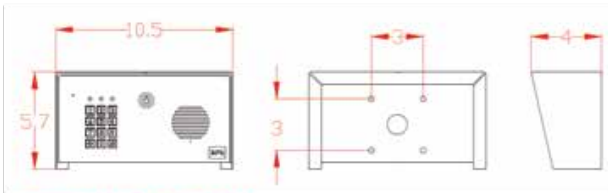

### BFTCELL-PRIME4GE

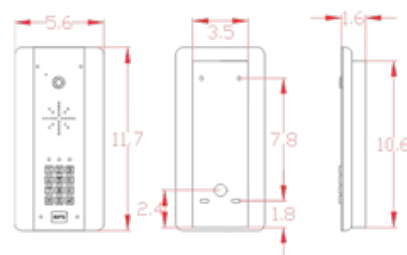

## TECHNICAL DATA

**BFTCELL-PRIME4G:** CELLULAR CALL BOX W/ KEYPAD- PEDESTAL MOUNT

**BFTCELL-PRIM4GE:** CELLULAR CALL BOX W/ KEYPAD-SURFACE VERTICAL MOUNT

**BFTCELL-PRI4GEF:** CELLULAR ACCESS SYSTEM W/KEYPAD VERTICAL FLUSHMOUNT

**BFTCELL-PRI4GFH:** CELLULAR ACCESS SYSTEM W/KEYPAD FLUSHMOUNT HORIZONTAL (STAINLESS STEEL RING)

### GENERAL:

Voltage: 15v dc  
 Recommended cable @ 25 feet: 14 gauge  
 Solar compatible: Yes  
 Current on standby: Operating 55mA  
 Current: 330mA  
 Peak Demand Current: Internal Fuse 2 Amps  
 Rating: 500mA quick blow

### CELLULAR MODULE:

Relays: 2 relays, max 2 amps, 24v ac/dc load  
 Latching: Yes  
 Caller ID users: 100  
 Programming: SMS & APP  
 Network compatibility: AT&T, T-Mobile

### KEYPAD CODES:

Standard codes: 200  
 Time zoned codes: 20  
 Temporary codes: 30

For more information, please visit [www.devancocanada.com](http://www.devancocanada.com) or call toll free at 855-931-3334