


P-639T

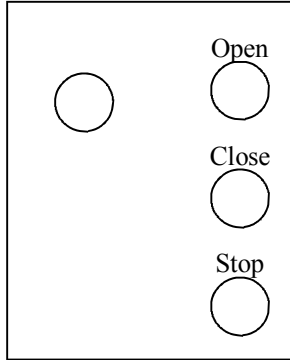

Open, Close & Stop Transmitter to Control 9 Doors.

Match dipswitches 1 thru 6 on both transmitter and receiver.
Set the 7th and 8th dipswitch in open/close/stop receivers accordingly.

Receiver	Dial Setting	7th Dipswitch on Receiver	8th dipswitch on Receiver
Door 1	1	“+”	“+”
Door 2	2	“+”	“O”
Door 3	3	“+”	“_”
Door 4	4	“O”	“+”
Door 5	5	“O”	“O”
Door 6	6	“O”	“_”
Door 7	7	“_”	“+”
Door 8	8	“_”	“O”
Door 9	9	“_”	“_”

“Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment”

For more information, please visit www.devancocanada.com or call toll free at 855-931-3334