

WIRELESS KEYPAD KPW250

SECTION 28 13 00



KEY FEATURES

UNIT INTERFACE CAPABILITIES	PIN
STAND ALONE	Yes
WIRELESS COMMUNICATION	Yes*

SPECIFICATIONS

POWER SUPPLY	9V Lithium battery (included in carton)
PROGRAMMING (DATABASE MANAGEMENT)	Keypad
LOCAL USER CAPACITY	250
MAX NUMBER OF GATES/DOORS OF CONTROL (EACH)	1
RELAY OUTPUT	1
MOUNTING OPTIONS	Surface/gooseneck
OPERATING TEMPERATURE	-4°F to 140°F (-20°C to 60°C)
CAMERA READY	No
ANTI-TAMPER ALARM	No
WARRANTY	1 year

CONSTRUCTION

ENCLOSURE MATERIAL	Zinc-alloy cover/polycarbonate back
--------------------	-------------------------------------

**For more information, please visit www.devancocanada.com
or call toll free at 1-855-931-3334**

*When used with LiftMaster® operators with Security+ 2.0® Radio


DATA SHEET
WIRELESS KEYPAD

LiftMaster®


WIRELESS KEYPAD KPW250

SECTION 28 13 00


DIMENSIONS




TOP

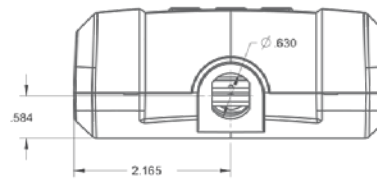


BOTTOM

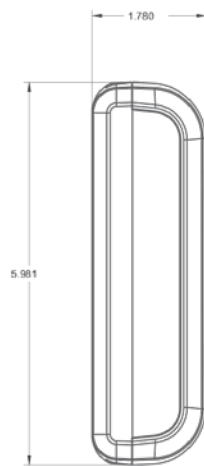


LEFT

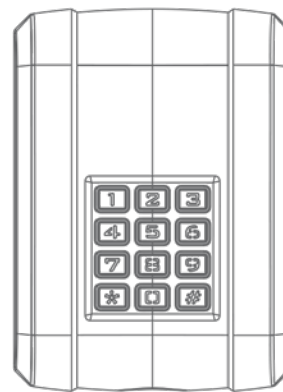

FRONT

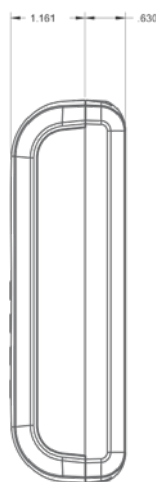

RIGHT

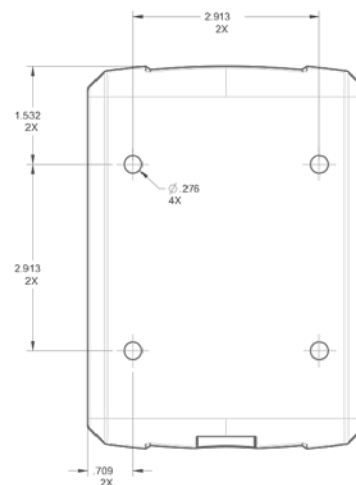

REAR