

MEGACODE®

MCT-11


1-BUTTON DIGITAL TRANSMITTER

Operation
Instructions

**Linear®**


For more information:
www.devancocanada.com

VISOR CLIP INSTALLATION

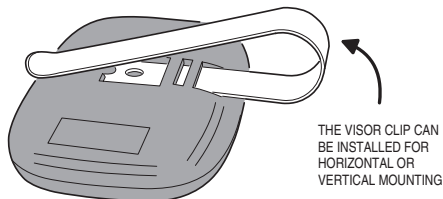

THE VISOR CLIP CAN
BE INSTALLED FOR
HORIZONTAL OR
VERTICAL MOUNTING

SLIDE THE VISOR CLIP INTO ONE
OF THE SLOTS ON THE REAR
OF THE TRANSMITTER

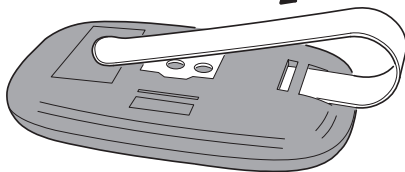

DESCRIPTION


The MCT-11 MegaCode® digital transmitter is a wireless radio control designed for use with automatic garage and gate operators.

MegaCode® transmitters and receivers do not contain a typical "coding switch". Each transmitter is permanently coded at the factory. The transmitter sends a unique code when the button is pressed. The receiver is programmed by "learning" a transmitter's unique digital code. The receiver will activate only from the "memorized" transmitters.

The transmitter is powered by two Type 2032 "coin-cell" batteries. They should last 3 years with normal use. The red indicator on the face of the transmitter will glow when the unit is activated. If the indicator lights dimly, or not at all when transmitting, the batteries need to be replaced. To conserve battery life, an internal timer limits the transmission duration to 10 seconds if the transmitter button is held down.

PROGRAM RECEIVER & TEST TRANSMITTER

Refer to the instructions provided with the receiver to set it into "learn" mode. With the receiver ready to learn, press the transmitter button to program the transmitter into the receiver's memory.

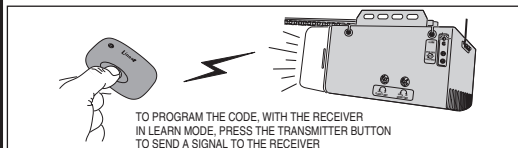

TO PROGRAM THE CODE, WITH THE RECEIVER
IN LEARN MODE, PRESS THE TRANSMITTER BUTTON
TO SEND A SIGNAL TO THE RECEIVER


After programming, test the transmitter from various locations. **Be sure the door or gate areas are clear.** Activate the transmitter and verify that the receiver triggers the operator.



ACTIVATE THE TRANSMITTER
TO TEST THE RECEIVER
AND OPERATOR

BE SURE THE DOOR OR
GATE AREA IS CLEAR!


REPLACING THE BATTERIES

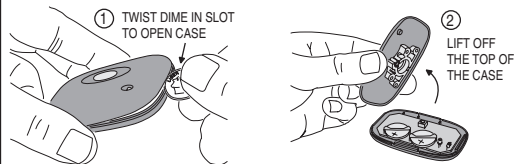

① TWIST DIME IN SLOT
TO OPEN CASE

② LIFT OFF
THE TOP OF
THE CASE

NOTE: THE CIRCUIT BOARD WILL FIT ONLY ONE
WAY INTO THE CASE. ALIGN THE PLASTIC POST
IN THE CASE WITH THE HOLE IN THE CIRCUIT BOARD

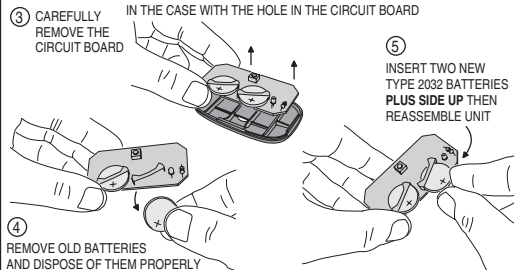

③ CAREFULLY
REMOVE THE
CIRCUIT BOARD

⑤ INSERT TWO NEW
TYPE 2032 BATTERIES
PLUS SIDE UP THEN
REASSEMBLE UNIT

④ REMOVE OLD BATTERIES
AND DISPOSE OF THEM PROPERLY

LINEAR LIMITED WARRANTY

This product is warranted to the consumer against defects in material and workmanship for one year from the date of purchase. This warranty applies to first retail buyers of new devices. Warrantor will repair, or at its option, replace, any device it finds that requires service under this warranty, and will return the repaired or replaced device to the consumer at the warrantor's cost. For warranty service and shipping instructions contact warrantor at the address shown below. Devices do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. In order to be protected by this warranty, save your proof of purchase and send copy with equipment should repair be required. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. All products returned for warranty service require a Return Product Authorization Number (RPA#). Contact Linear Technical Services at 1-800-421-1587 for an RPA# and other important details.

IMPORTANT !!!

Linear radio controls provide a reliable communications link and fill an important need in portable wireless signaling. However, there are some limitations which must be observed.

- For U.S. installations only: The radios are required to comply with FCC Rules and Regulations as Part 15 devices. As such, they have limited transmitter power and therefore limited range.
- A receiver cannot respond to more than one transmitted signal at a time and may be blocked by radio signals that occur on or near their operating frequencies, regardless of code settings.
- Changes or modifications to the device may void FCC compliance.
- Infrequently used radio links should be tested regularly to protect against undetected interference or fault.
- A general knowledge of radio and its vagaries should be gained prior to acting as a wholesale distributor or dealer, and these facts should be communicated to the ultimate users.
- This device complies with FCC Part 15 and Industry Canada Rules and Regulations. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

HOW TO ORDER REPAIR PARTS

DEVANCO CANADA

19192 HAY ROAD, UNIT Q
SUMMERSTOWN, ON K0C 2E0

TOLL FREE: 855-931-3334
www.devancocanada.com

**WHEN ORDERING REPAIR PARTS
PLEASE SUPPLY THE FOLLOWING INFORMATION:**

- ✓ **PART NUMBER**
- ✓ **DESCRITPION**
- ✓ **MODEL NUMBER**