

Devanco Canada Stinger2™ Type: 311DEK31V2

FCC ID: SU7311DEK31V2

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept interference received, including interference that may cause undesired operation.

Notice

Any changes or modifications to Devanco Canada equipment not expressly approved by Devanco Canada could void the manufacturer's warranty and could void the user's authority to operate the equipment.

WARRANTY

The warranty period of Devanco Canada Stinger2™ transmitters is twenty-four (24) months. This warranty shall begin on the date the transmitter is manufactured. During the warranty period, the product will be repaired or replaced (at the sole discretion of Devanco Canada) if the product does not operate correctly due to a defective component. This warranty does not extend to (a) the transmitter case, which can be damaged by conditions outside the control of Devanco Canada, or (b) battery life of the transmitter. This warranty is further limited by the following disclaimer of warranty and liability:

EXCEPT AS SET FORTH ABOVE, DEVANCO CANADA MAKES NO WARRANTIES REGARDING THE GOODS, EXPRESS OR IMPLIED, INCLUDING WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. BUYER MAKES NO RELIANCE ON ANY REPRESENTATION OF DEVANCO CANADA EXPRESS OR IMPLIED, WITH REGARD TO THE GOODS AND ACCEPTS THE "AS-IS/WHERE-IS". DEVANCO CANADA SELLS THE GOODS TO BUYER ON CONDITION THAT DEVANCO CANADA WILL HAVE NO LIABILITY OF ANY KIND AS A RESULT OF THE SALE. BUYER AGREES THAT DEVANCO CANADA SHALL HAVE NO LIABILITY FOR DAMAGES OF ANY KIND, WHETHER DIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING INJURIES TO PERSONS OR PROPERTY, TO BUYER, ITS EMPLOYEES OR AGENTS, AS A RESULT OF THE SALE. BUYER ALSO AGREES TO HOLD DEVANCO CANADA HARMLESS FROM ANY CLAIMS BUYER, OR ANY THIRD PARTY, MAY HAVE AS A RESULT OF BUYER'S USE OR DISPOSAL OF THE GOODS. BUYER HAS READ THIS DISCLAIMER AND AGREES WITH ITS TERMS IN CONSIDERATION OF RECEIVING THE GOODS.

DEVANCO CANADA

19192 Hay Rd. Unit Q
Summerstown, ON K0C 2E0
www.devancocanada.com
855-931-3334

Manual - 311 1 Button

DEVANCO

 **CANADA**



STINGER²

TRANSMITTER



T-931-S

*Thank you for choosing a Devanco Canada product.
Please read this manual carefully before using the product.*

Made in Taiwan. Copyright© 2017 Devanco Canada.

CONTENTS

1 - TRANSMITTER OVERVIEW

- 1A - General information
- 1B - Technical specifications
- 1C - Main components

2 - PROGRAMMING

3 - OPERATION

4 - BATTERY ACCESS

5 - TROUBLESHOOTING

1A - General information

The Devanco Canada Stinger2™ Transmitter is a very small (1-3/4" x 3" x 1/2") visor style wireless transmitter operating at 311 MHz. The Stinger2™ achieves its small size by using state-of-the-art, surface mount components. It has been designed for use with dip switch receivers operating at 311 frequency.

2 - PROGRAMMING

Set the nine-digit toggle code switch to match the code set from another functioning transmitter. Access to the Stinger2™'s toggle code switch is achieved by sliding up the front cover and battery (if necessary). Move switches using a small pointed object, such as a paper clip, gently switching the small switches to either the +, -, or neutral position. (In Detail below, switches 1 and 3 are in the + position, switches 2, 4, 7 and 9 are in the - position, and switches 5, 6 and 8 are in the neutral position.) When complete, reinstall battery and side front cover back into its original position.

3- OPERATION

Once the codes are set to match the transmitter codes, you may test the system. Ensure the gate or door is visible and clear before testing.

Step 1. Push the Stinger2™'s button from a distance of about ten feet. If the receiver activates, the switches are properly matched.

Step 2. Test the transmitter from several locations to discover any "blind spots" caused by interference.

4 - BATTERY ACCESS

Slide front cover down to reach battery compartment. Attend to proper polarity when installing or replacing battery. See "programming" for proper removal and replacement of cover.



5 - TROUBLESHOOTING


PROBLEM	SOLUTION
The system does not receive the transmitter signal. The transmitter LED will not light.	Ensure clear plastic battery insulator has been removed; OR Replace the transmitter battery.
The system does not receive the transmitter signal. The transmitter LED is ON.	Check to ensure the transmitter switches are coded to match your system receiver.
The operating range is reduced.	Replace the transmitter battery.

The A23 battery has a shelf life of about 1 year. The product fully complies with Part 15 of the FCC Regulations.

1B - Technical Specifications

Operating frequency	311 MHz
Number of buttons	1
Battery:	1 ea. 12V A23
Operating temperature:	-20°F – 100°F
Overall dimensions:	1-3/4" x 3" x 1.2" inch
Weight:	1 oz.

1C - Main components

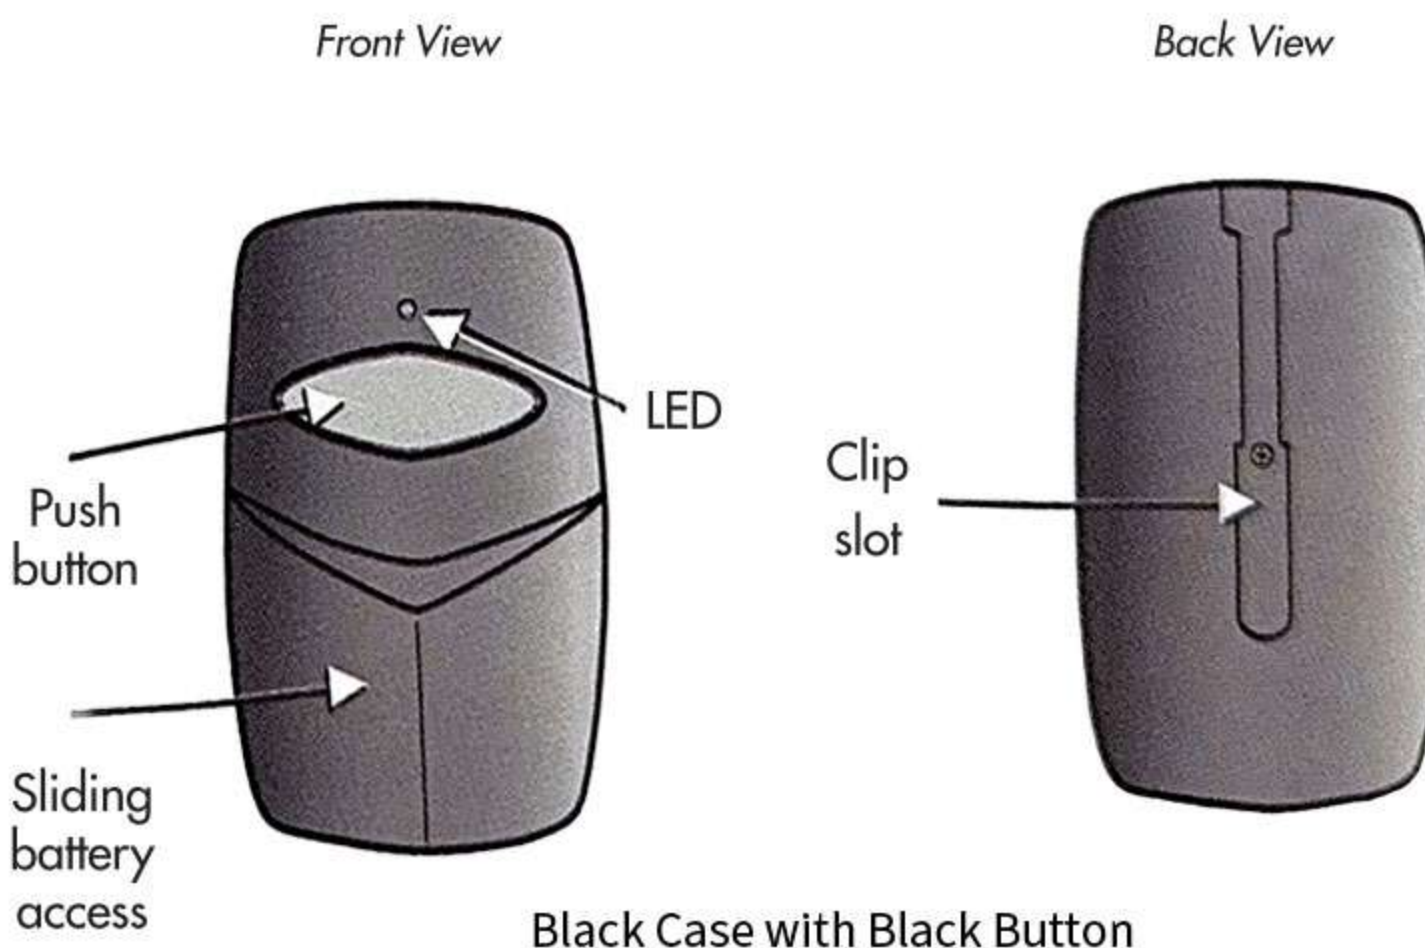

HOW TO ORDER REPAIR PARTS

DEVANCO CANADA

19192 HAY ROAD, UNIT Q
SUMMERSTOWN, ON K0C 2E0

TOLL FREE: 855-931-3334
www.devancocanada.com

**WHEN ORDERING REPAIR PARTS
PLEASE SUPPLY THE FOLLOWING INFORMATION:**

- ✓ PART NUMBER
- ✓ DESCRIPTION
- ✓ MODEL NUMBER